

Lone Star Aviation, Inc.
 604 S. Wisteria Street
 Mansfield, Texas 76063
 682-518-8882 ph
 682-518-8831 fax

REVISION BLOCK					
REV	ECD #	ZONE	DESCRIPTION OF CHANGE(S)	DATE	CHANGED/APPROVED
Rev-0			INITIAL RELEASE	9-16-10	JRM/LD

Bulkhead Audio Noise Filter

Max Current: 32 Amps/60°C
 Max Voltage: 130 VDC
 Capacitance: 47nF +/- 20%
 Operating Temp: -40°C to 60°C
 Flammability: UL94V-0
 Material: Nickel Plated Brass
 MTBF: 10 million hours typical
 Design: Full Feed Through

INSTALLATION:


Drill .50" hole in Chassis
 Crimp ring terminal to
 Voltage IN and Voltage
 Out lines.

NOTE 1:

Symmetrical Filter, Power
 can be applied to either
 (+) terminal.

NOTE 2:

This part should be
 installed in accordance
 with CFR-14 Part-43 and
 AC 43.13.1B

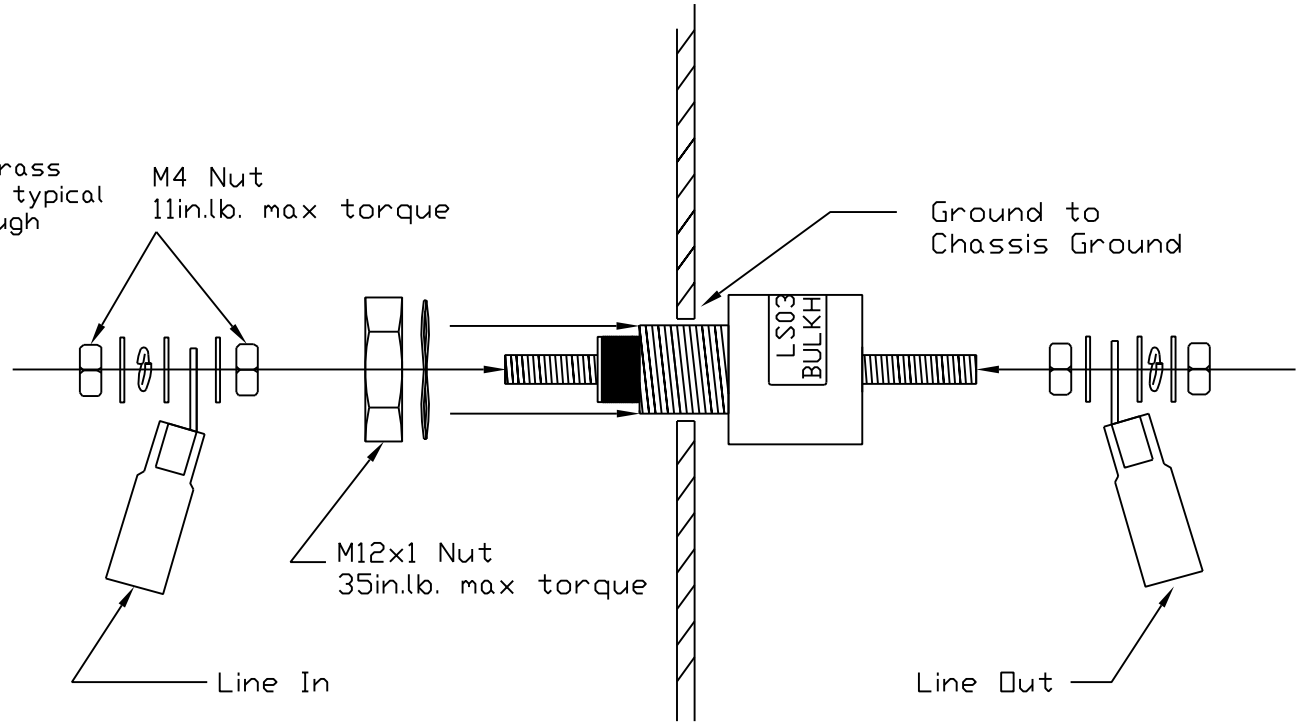

Frequency - MHz

0.1	0.3	1	10	100	1000
2	6	15	34	50	90

Model - G

ITEM #	QTY.	PART NO.	DESCRIPTION
UNLESS NOTED OTHERWISE TOLERANCE BLOCK: DIMENSIONS ARE IN METRIC DECIMALS		PROPRIETARY THIS DOCUMENT AND THE DATA DISCLOSED HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT WRITTEN AUTHORIZATION FROM LONE STAR AVIATION	
XX ±.030		ANGULAR ±1°	
XXX ±.015			
XXXX ±.0005			
DO NOT SCALE DRAWING		APPROVALS	DATE
MATERIAL N/A		JRM	9-16-10
FINISH N/A		APPROVED BY JRM	9-16-10
		NEXT ASSY.	
TITLE			REV-0
Bulkhead Filter Install			
SIZE		DRAWING NO.	
A		LS03-01040-G	
SCALE		SHEET	1 OF 1
NONE			

