



EZ COOL FLAP

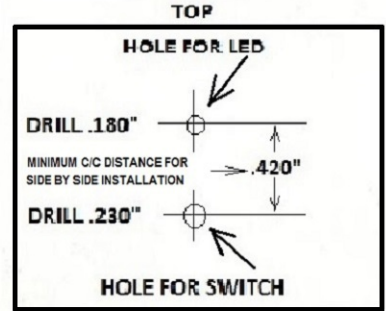

SHOULD BE DONE

If you are installing a fuse or circuit breaker the correct size is .5 amp. One per unit will protect the wiring and electronics as well

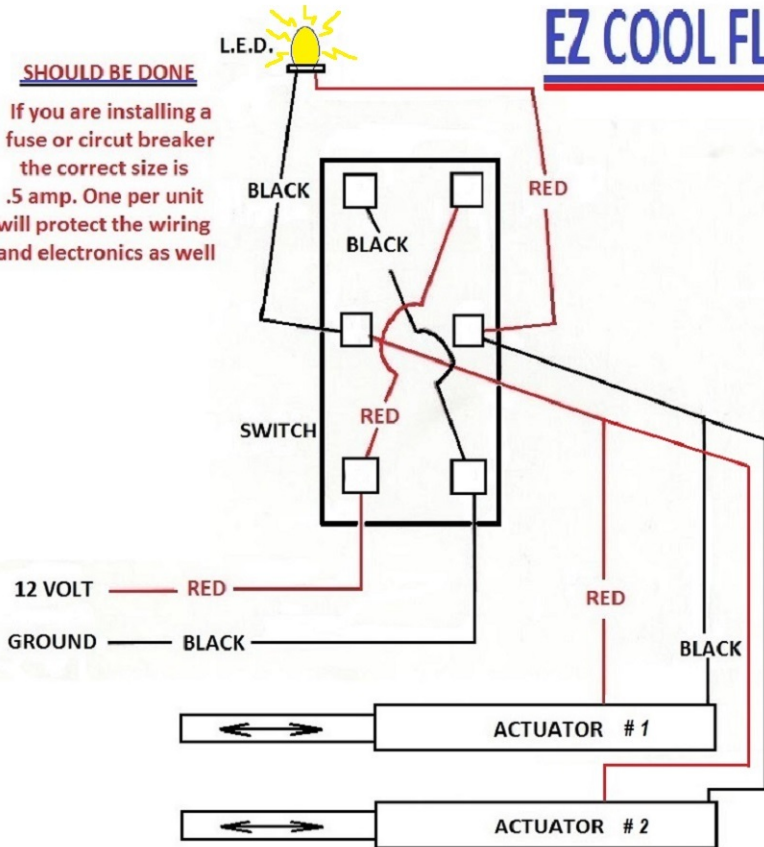

PANEL LAYOUT

CAUTION

Be sure to verify all dimensions before cutting holes in cowl

DRILL .201" HOLES 4 plcs.

6.100"

4.675"

FRONT

After installing this unit in cowl, be sure to shield the actuator from radiated heat emitted from exhaust pipes. This is potentially damaging to the actuator and can melt plastic parts rendering it inoperative. A small piece of aluminum sheet with standoffs on the pipes will prevent most heat damage and keep from damaging the EZ Cool.

Also the heat muff will help keep heat off the actuator. All efforts to keep heat off this electronic actuator will extend its life and keep your unit operational for years to come.