



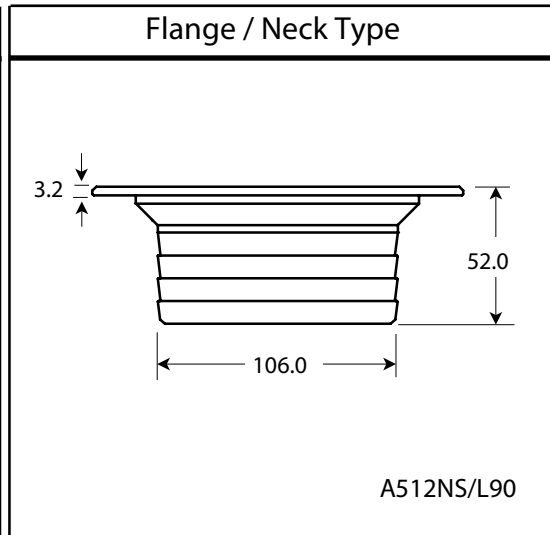


Aero 500 Tech Specs

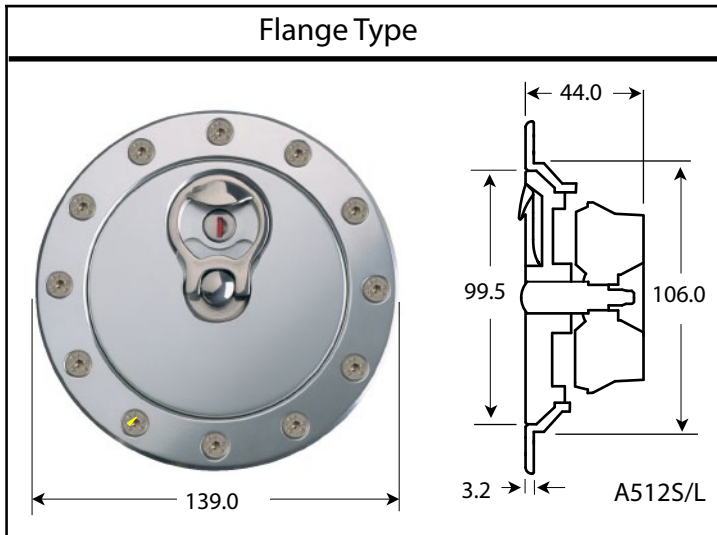

Specification
Applications: Fuel, oil & water
Features:
Fixing Holes: 12 x 5.2 mm csk
Bolt Circle: 120.6mm (4.75 inches)
Material:
Flange & Flange/Neck: Aluminium Alloy 6082 T6
Lever: Stainless Steel 310
Finish:
Anodised: Clear (Silver) - option: Black, Hard Anodised
All dimensions are in Millimetres

Flange Options			
Code	Weight	Bolts	PCD
A512S*	388.5 g	12	120.6 mm
A512L*	404.0 g	12	120.6 mm
A58S*	361.0 g	8	117.4 mm
A58L*	376.5 g	8	117.4 mm

FN512S/L90* - Aero 500 Flange/Neck	
Code	Weight
FN512NS90 :	519.0 g.
FN512NL90 :	534.0 g.

	<p style="text-align: center;">Locking version (A512L)</p> <ul style="list-style-type: none"> The Aero 500 is available in locking *(L) and non-locking *(S) options. Arrangements can be made to supply a series with matching key numbers.
---	--

In accordance with our policy of continuous improvement we reserve the right to change our products without prior notice. Please contact our Technical Office for notice of any product updates. Rev. 00.05.10

Fluid Containment - When It Matters

Tel: +44 (0)20 8594 7990 / Fax: +44 (0)20 8594 7989 / www.newton-equipment.com / info@newton-equipment.com

Registered in England . Ajax Works, Hertford Road, Barking, Essex, IG11 8DY, UK

© Newton Equipment 2010