
## ENGINE CRANK CASE OIL BREATHER



Designed for 5/8 or 3/4 hose barb PN 08-00765

qqq

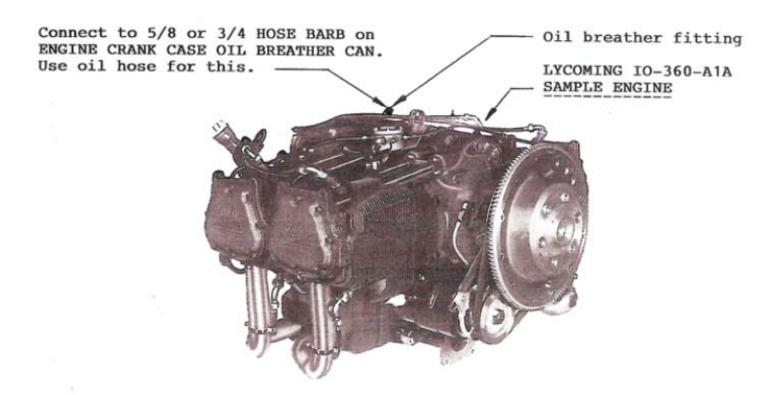

HOSE BARB

VENT HOLES

Mount can so that vent holes face up. Mount can down low on the fire wall.

MOUNTING CLAMP

OIL OVERFLOW HOLE

Check CURTIS DRAIN VALVE after the first 10 hours for oil. If oil is present drain and check every 25 hours. This will keep the oil off the belly.

CURTIS DRAIN VALVE

For questions contact COGSWELL ENGINEERING 2965 EVEREST WAY CORONA, CA 92881-8345

PHONE 951-735-8679 FAX 951-278-3563

Recommended for experimental aircraft. Not STCD for certified aircraft.